


100× M Plan Apo 480-1800nm 显微物镜 690028



No	项目		规格
1	视场数		30mm/16mm(NIR)
2	焦距		2mm
3	放大倍率		100×
4	接口		M26×0.706
5	工作距离		12mm
6	数值孔径NA		0.5
7	视场(相机) (水平×垂直)	1/2" 2/3"	0.06mm×0.05mm 0.09mm×0.07mm
8	视场(目镜)	Φ24 Φ18	0.24mm 0.18mm
9	齐焦距离		95mm
10	分辨能力		0.6μm
11	景深		4.1μm
12	镜头尺寸		Φ34×L 88mm
13	重量		335g
14	工作温度		-5℃~+45℃
15	工作波长		480-1800nm
16	出瞳直径		2.0mm
17	出瞳位置		5mm
18	脉冲宽度(10ns)时 脉冲激光输入上限	激光波长532nm 激光波长1064nm	0.1(J/cm²) 0.2(J/cm²)
19	连续振荡(CW)激光 输入上限值	激光波长532nm 激光波长1064nm	0.25(kW/cm²) 0.5(kW/cm²)

尺寸图

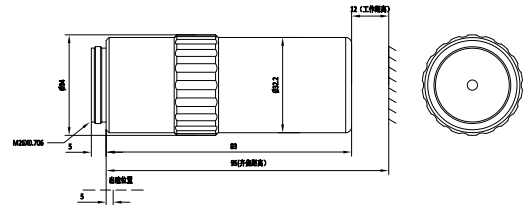

透过率曲线

