


注释:

- 1. 材料: 紫外熔融石英
- 2. 入射角: $0\pm2^\circ$
- 3. 光洁度: 60-40
- 4. 中心波长: 1030nm
- 5. 半带宽: 3.9 nm (typical);
7.2 nm (maximum)
- 6. 透过带: Tabs>90% 1030nm
- 7. 截止带1: ODabs>5@947.6-1014.6nm
- 8. 截止带2: ODabs>6@1014.6-1019.7nm
- 9. 截止带3: ODabs>6@1045.5-1133nm
- 10. 截止带4: ODabs>5@1040.3-1368.2nm
- 11. 激光损伤阈值: $0.1\text{J}/\text{cm}^2$ @532nm (10ns pulse width)

最小有效孔径 $\phi 10.00$

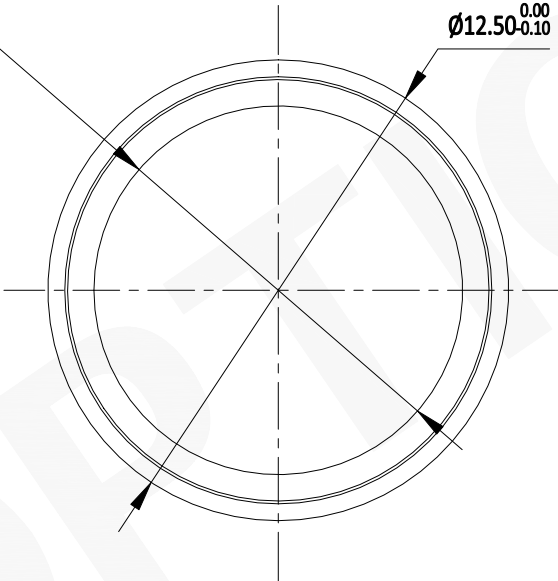

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

 GU OPTICS			
联合光科技（北京）有限公司			
名称	高性能窄带带通滤光片-已封装 D=12.50mm		
产品编号	199419	单位: mm	投影 