


2/3" 手动变焦镜头 640001

2/3" 5MP C M-Iris

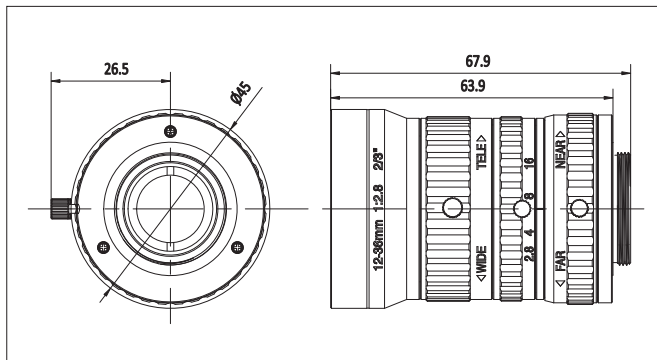

W			
No	项目	规格	
1	最大传感器尺寸	2/3"(11mm)	
2	焦距	12mm	
3	接口	C-Mount	
4	F/#	F2.8-F16	
5	工作距离	0.15m~∞	
6	视场角(对角×水平×垂直)	2/3"	50.8°×41.3°×31.3°
		1/2"	37.7°×30.3°×22.8°
		1/3"	28.5°×22.8°×17.2°
7	对象大小(在最近对焦距离处)	2/3"	173.2×135.8×100.2mm
		1/2"	122.7×97.1×72.2mm
		1/3"	90.8×72.2×53.8mm
8	后焦距 (in air)	18.93mm	
9	操作方式	对焦	手动
		对焦	手动
		光圈	M-Iris
10	畸变率	2/3"	-3.45%@y=5.5mm
		1/2"	-2.22%@y=4.0mm
		1/3"	-1.34%@y=3.0mm
11	滤镜尺寸	M40.5×0.5mm	
12	镜头尺寸(宽×长)	49×67.9mm	
13	重量	188g	
14	工作温度	-10°C~+50°C	
15	入瞳距离	31.34mm	
16	入瞳直径	4.22mm	
17	出瞳距离	-37.88mm	
18	出瞳直径	13.34mm	
19	光学总长	78.69mm	
20	放大倍率	-0.0673	

T			
No	项目	规格	
1	最大传感器尺寸	2/3"(11mm)	
2	焦距	36mm	
3	接口	C-Mount	
4	F/#	F2.8-F16	
5	工作距离	0.45m~∞	
6	视场角(对角×水平×垂直)	2/3"	17.2°×13.8°×10.5°
		1/2"	12.6°×10.1°×7.6°
		1/3"	9.5°×7.6°×5.7°
7	对象大小(在最近对焦距离处)	2/3"	157.4×125.9×94.5mm
		1/2"	144.5×91.6×68.7mm
		1/3"	85.9×68.7×51.5mm
8	后焦距 (in air)	18.87mm	
9	操作方式	对焦	手动
		对焦	手动
		光圈	M-Iris
10	畸变率	2/3"	1.45%@y=5.5mm
		1/2"	0.69%@y=4.0mm
		1/3"	0.37%@y=3.0mm
11	滤镜尺寸	M40.5×0.5mm	
12	镜头尺寸(宽×长)	49×67.9mm	
13	重量	188g	
14	工作温度	-10°C~+50°C	
15	入瞳距离	96.36mm	
16	入瞳直径	12.66mm	
17	出瞳距离	-37.95mm	
18	出瞳直径	13.38mm	
19	光学总长	78.67mm	
20	放大倍率	-0.0699	

对焦距离	放大倍率	前景深(mm)	后景深(mm)
150mm	-0.06732	2.2324	2.3009
200mm	-0.05255	3.9491	4.1115
250mm	-0.04310	6.1401	6.4573
300mm	-0.03654	8.7986	9.3468
350mm	-0.03170	11.9180	12.7880

对焦距离	放大倍率	前景深(mm)	后景深(mm)
450mm	-0.06986	2.2584	2.2813
500mm	-0.06361	2.7866	2.8180
550mm	-0.05840	3.3699	3.4118
600mm	-0.05398	4.0083	4.0626
650mm	-0.05019	4.7015	4.7706

